

SMT POWER INDUCTORS

Toroid - Military/Aerospace POGO Series



- Ruggedized header with POGO pins for secure board mounting
- Current Rating:** up to 23.8Adc
- Frequency Range:** up to 1MHz

Electrical Specifications @ 25°C — Operating Temperature -55°C to +130°C

Pulse 4,5 Part Number	Inductance @ Irated (μH)	Irated (A)	DCR (mΩ)		Inductance @ 0Adc (μH)	Reference ET (Volt-μsec)	Flux Density Factor (K1)	Core Loss Factor (K2)	Temp. Rise Factor (K3)	Connection
			TYP	MAX						
POGO 40										
PL8400	43.6	1.1	247.2	309	77	7.83	0.295	1.87E-10	114.23	Single
POGO 50										
PL8401	21.9	2.7	72.4	90.5	39.5	6.9	0.297	3.35E-10	85.71	Single
PL8402	4.025	6.4	18.4	23	6.575	3.135	0.638	4.52E-10	67.89	Single
PL8403	0.53	23.8	1.0	3	0.88	1	2.020	3.35E-10	85.71	Parallel
PL8404	1.1	21	1.7	2.5	2.1	1.75	1.116	4.52E-10	67.89	Parallel
POGO 60										
PL8405	2.1	22.4	2.5	3.4	4	3.25	0.559	9.58E-10	44.56	Parallel

NOTES:

- Reference values are for an inductor with a 55°C temperature rise. The core loss is 10% of the copper loss at the ET listed and 500kHz.
- Core does not saturate abruptly. The ET and DC current are limited by the desired inductance and temperature rise.
- In high volt-time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate total losses (or temperature rise) for a given application, both copper and core losses should be taken into account.


Estimated Temperature Rise:

$$\begin{aligned} \text{Trise} &= K3 * (\text{CoreLoss}(W) + \text{CopperLoss}(W))^{.833} \text{ (C)} \\ \text{CopperLoss} &= \text{Irms}^2 * \text{DCR_Typical (m}\Omega) / 1000 \\ \text{CoreLoss} &= K2 * (\text{Freq_kHz})^{1.26} * (\Delta B)^{2.11} \\ \Delta B &= K1 * \text{Volt-}\mu\text{sec} * 100 \end{aligned}$$

- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PL8400 becomes PL8400T). Pulse complies to industry standard tape and reel specification EIA481.

Mechanical

Schematic

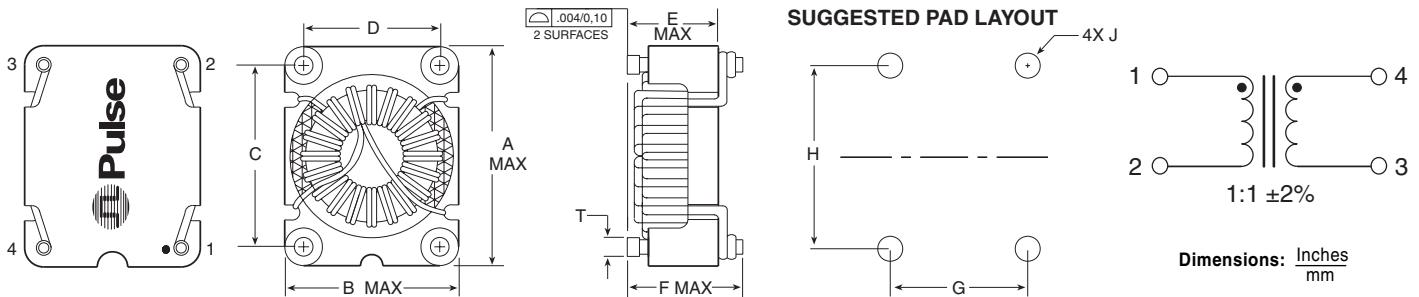

PKG	A	B	C	D	E	F	G	H	J	T	Weight (MAX)	Tube	Reel
POGO 40	.725	.575	.600	.450	.310	.380	.450	.600	.082	.062	3.5 grams	30	300
	18,42	14,61	15,24	11,43	7,87	9,65	11,43	15,24	2,08	1,57			
POGO 50	.910	.700	.730	.520	.400	.510	.520	.730	.145	.125	8.2 grams	35	200
	23,11	17,78	18,54	13,21	10,16	12,95	13,21	18,54	3,68	3,18			
POGO 60	1.280	1.070	1.100	.890	.400	.510	.890	1.100	.145	.125	14.2 grams	15	100
	32,51	27,18	27,94	22,61	10,16	12,95	22,61	27,94	3,68	3,18			

For More Information:

Pulse Worldwide Headquarters	Pulse Northern Europe	Pulse Southern Europe	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
2 Pearl Buck Court Bristol, PA 19007 U.S.A. www.pulseeng.com TEL: 215 781 6400 FAX: 215 781 6403	3 Huxley Road Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	No. 1 Industrial District Changan, Dongguan China TEL: 86 769 5538070 FAX: 86 769 5538870	Room 1002 No. 819 Nanjing West Rd Shanghai China TEL: 86 21 32181071 FAX: 86 21 32181396	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 Hsin Tai Wu Road Hsi-Chih Taipei Hsien Taiwan TEL: 886 2 26980228 FAX: 886 2 26980948

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2005. Pulse Engineering, Inc. All right reserved.

www.pulseeng.com

M111.A (9/05)